



## SL 408 OUTDOOR HIGH LIFTER

LIFTS UP TO 380 KG / 837 LBS.

The SL 408 Outdoor High Lifter is designed for installations that require additional reach and lifting height.

The lift easily reaches across basement shafts or flower beds. Wide tyres make the lift suitable for difficult off-road jobs. The tires are poly-filled puncture proof.

This is our most popular model that has all the features needed for the majority of window installations.



Available in all colors



EXTENSION OF ARM  
**120 CM** / 3 FT. 11 IN.



LIFTING HEIGHT  
**3.25 M** / 9 FT. 2 IN.









Longer reach and versatility



**Smart Lift®**

[www.smartlift.com](http://www.smartlift.com)

## BASIC DATA

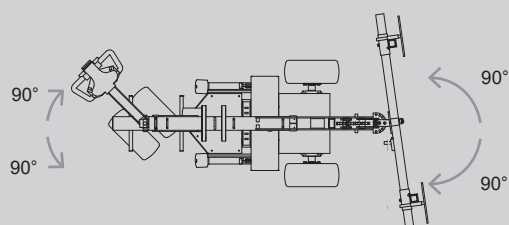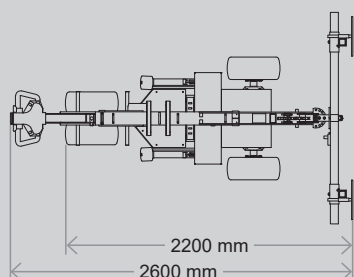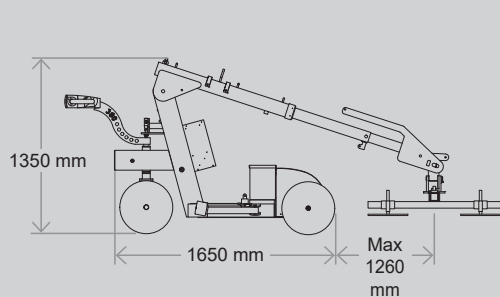

## TECHNICAL SPECIFICATIONS

Lifting cap. arm in/out	380 kg/100 kg - 837 lbs./220 lbs.
Lifting height	3,250 mm / 128 in.
Extension of arm	600 + 600 mm / 24 + 24 in.
Tip from horizontal	45° back / 90° fwd.
Side shift	100 mm / 4 in.
Charging voltage	230 V / 110V
Charging time	Approx. 8 hrs.
Battery	2 x 105 Ah
Running period	Up to 10 hrs.
Front wheel drive	1200 W AC
Suction pads	4 x Ø 300mm / Ø12 in.
Curb weight	680 kg / 1,500 lbs.
Class	IP 65

## LIFTING DIAGRAM

